

S 8000

Tilt and Turn Window

Up to

0.17

U-factor value in BTU/hr.ft².°F



S 8000


Tilt and Turn Window

Criteria

System	S 8000	
Available surfaces	Decorative foil, white	
	Frame	Sash
Art.No.	8001	8095
Number of chambers	6	6
Profile height	2-19/32"	3-5/64"
Max. IGU thickness	1-7/8"	
Maximum Size**	Width*	Height*
	up to 61"	up to 93"
Maximum Area	26 ft ²	

*the ratio of height/width cannot exceed maximum area

**For fixed windows, max. width and max. height are up to 137" and max. area is up to 75 ft².

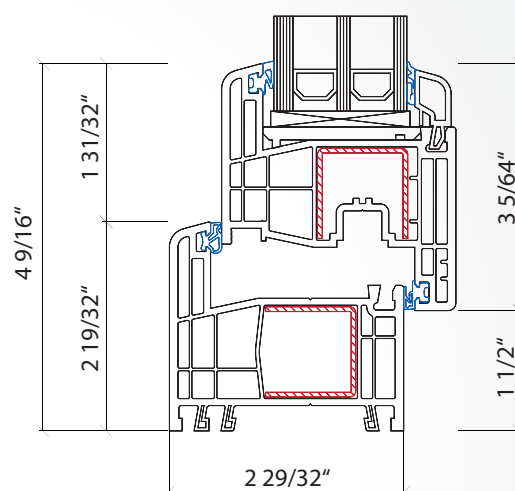

NFRC Test Values

U-factor (triple pane)	up to 0.17 BTU/hr.ft ² .°F
U-factor (double pane)	up to 0.22 BTU/hr.ft ² .°F
SHGC	0.09 - 0.53
VT	0.09 - 0.55
CR	up to 75

Acoustic Performance

STC	31-47
OITC	20-37